






Industrial-type socket-outlets conforming to IEC 309 Standard, with mechanical interlock consisting of a circuit breaker enabling the plug to be connected and disconnected only in the open position, and the switch to close only with the plug inserted. Wide range including models with rotary switch and fuseholder base, AUTOMATIKA with 6kA C characteristic miniature circuit breaker, and version with safety transformer. High application versatility thanks to the possibility of assembly in back-mounting and flush-mounting boxes, and boards of the 68 Q-DIN and Q-MC ranges.


kartuş Sigorta tipi	Ø 22x58 mm	Tip	Dikey
Sigorta kesme kapasitesi	> 50 kA	Bilyeli termo sıcaklık	125 °C
Nominal yalıtım voltajı	500 V	IP derecesi	IP67
Kutup adedi	2P+T	Direnç dayanıklı	IK08
Frekans	50/60 Hz	Çalıştırma sıcaklığı	-25 +40 °C
Koruma	Sigorta yuvası (CBF)	montaj kutulu	Hayır
Elektrokod	2222	Akkor Tel Deneyi	850 °C
Renk	Kırmızı	Kesme kapasitesi	10 kA
Weight	Max. 2.2 Kg	IB socket outlet rated current (In)	54 A
Voltaja dayanıklı nominal impuls	4 kV	Nominal akım (A)	63
Referans h	9	Nominal voltaj	380 - 415 V



### DIMENSIONAL

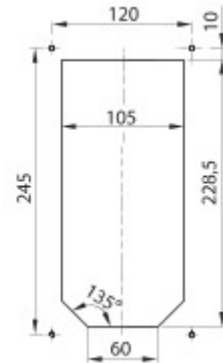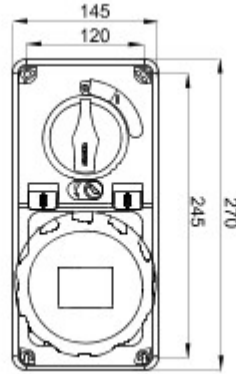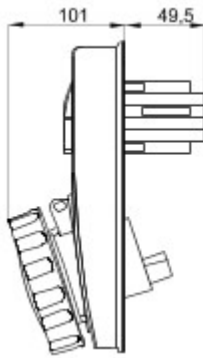

### TECHNICAL SYMBOLOGY



125 °C

**IP**

IP67

**IK**

IK08



**GWT**

850 °C

-25 +40 °C

### STANDARDS/APPROVALS

