




Wide range of switches, energy sockets (compliant with national and international standards), data sockets, devices for the management of climate control, comfort, technical alarms signalling, emergency lighting. The Chorus modular devices are available in four colors, glossy white, satin black, painted titanium and glossy ivory and in different modularities, 1/2, 1, 2 and 3 modules. Thanks to the frame supports for rectangular, square and round boxes, the devices allow you to create endless combinations with the range of Chorus plates.

Kategori	Ara vavien	Tuř	Deđiřtirilebilir gstergeli
Renk	Siyah	Tanım	1P - 16AX ıřıklandırılabilir
Voltaj	250 V ac	Standart	EN 60669-1
Test voltajındaki rezistans	1 dak. iin 2000 V a 50 Hz	Rated power of 230V LED lamps	200 W
Yalıtım direnci	> 5 Mhm	Kablolama terminalleri	Vidalı
Uzatılmıř kullanım (konum deđiřiklikleri sayısı)	40.000, 250 V ac cos=0,6	Bilyeli termo sıcaklık	125 C
Akkor Tel Deneyi:	850 C	Kablo ekmede terminal tutuřu	> 50 N
Terminal sıkıřtırma kapasitesi esnek kablolar (mm2)	min. 0,75 - maks. 2x4	Terminal sıkıřtırma kapasitesi sert kablolar (mm2)	min. 0,5 - maks. 2x2,5
Chorus sayısı modller	3	Elektrokod	0130

DIMENSIONAL

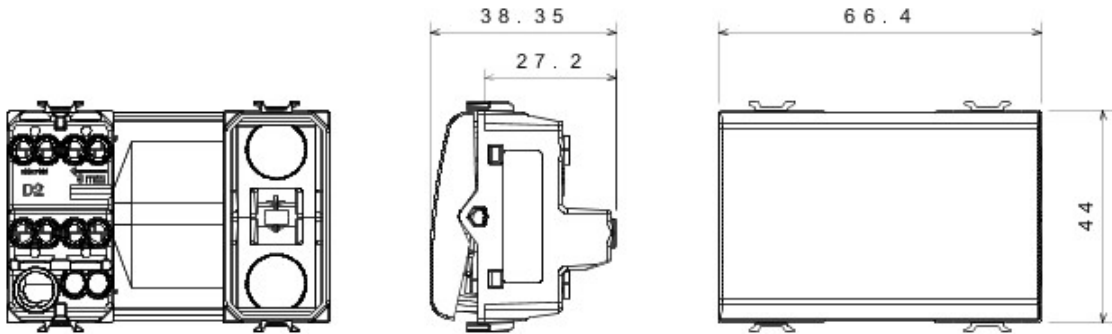

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

