



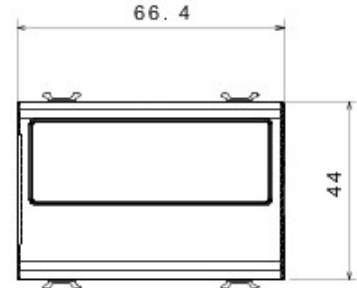

Wide range of switches, energy sockets (compliant with national and international standards), data sockets, devices for the management of climate control, comfort, technical alarms signalling, emergency lighting. The Chorus modular devices are available in four colors, glossy white, satin black, painted titanium and glossy ivory and in different modularities, 1/2, 1, 2 and 3 modules. Thanks to the frame supports for rectangular, square and round boxes, the devices allow you to create endless combinations with the range of Chorus plates.

Kategori	Etiketli zil butonu	Tipi	İsim levhası
Renk	Siyah	Tanım	1P NA - 10A
Voltaj	250 V ac	Standart	EN 60669-1
Test voltajındaki rezistans	1 dak. için 2000 V a 50 Hz	Yalıtım direnci	> 5 MOhm
Kablolama terminalleri	Vidalı	Uzatılmış kullanım (konum değişiklikleri sayısı)	40.000, 250 V ac cosØ=0,6
Lamba	Kartuş lambası	Bilyeli termo sıcaklık	125 °C
Akkor Tel Deneyi:	850 °C	Lamba voltajı	12-24V ac/dc
Kablo çekmede terminal tutuşu	> 50 N	Lamba gücü	2 W
Terminal sıkıştırma kapasitesi esnek kablolar (mm2)	min. 0,75 - maks. 2x4	Terminal sıkıştırma kapasitesi sert kablolar (mm2)	min. 0,5 - maks. 2x2,5
Chorus sayısı modüller	3	Elektrokod	0130

### DIMENSIONAL



### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

