


Wiring device system specific for installations in round and square boxes, characterized by an elegant appearance and classic shapes. The plates, realized in technopolymer in seven colors and in different modularities, from 1 up to 5 gang, are installable indifferently in horizontal or in vertical position. The range, developed around a core of monobloc devices, is available in two colors: white and ivory, in glossy finish. Expandable thanks to the Chorus modular devices.

Kategori	Vavien	Tuř	Nötr
Renk	Krem	Malzeme	Teknopolimer
Bitiř	Parlak	Tanım	1P - 10 AX backlit
Voltaj	250 V ac	Terminal tipi	Vidasız
için	Tırnaklı/Vidalı	Rated power of 230V LED lamps	100 W
Akkor Tel Deneyi	850 °C	Bilyeli termo sıcaklık	125 °C
Test voltajındaki rezistans	1 dak. için 2000 V a 50 Hz	Yalıtım direnci	> 5 MOhm
Uzatılmış kullanım (konum deęiřiklikleri sayısı)	40.000, 250 V ac cosØ=0,6	Kablo çekmede terminal tutuđu	30 N
Terminal sıkıřtırma kapasitesi	0,5-2x2,5 mm ² sert kablo uçları	Standart	EN 60669-1; 2014/35/EU

DIMENSIONAL

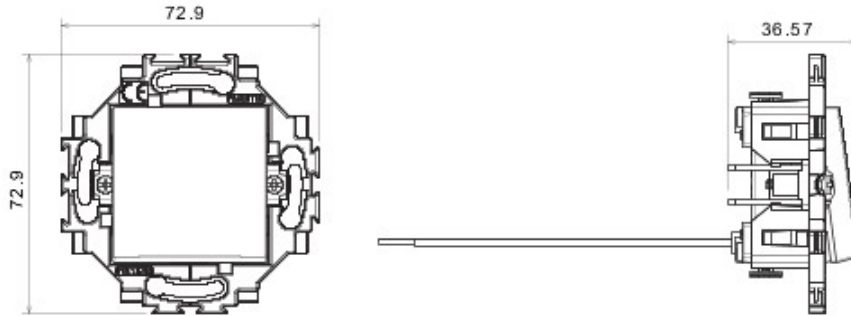

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

