


Wiring device system specific for installations in round and square boxes, characterized by an elegant appearance and classic shapes. The plates, realized in technopolymer in seven colors and in different modularities, from 1 up to 5 gang, are installable indifferently in horizontal or in vertical position. The range, developed around a core of monobloc devices, is available in two colors: white and ivory, in glossy finish. Expandable thanks to the Chorus modular devices.

Kategori	Priz	Standart	Alman standardı
Renk	Krem	Malzeme	Teknopolimer
Bitiş	Parlak	Tanım	2P+T - 16A
Voltaj	250 V ac	Tipi	Kapaklı
Fiş pinleri için	Ø 4.8 mm	Özellikler	çocuk koruma için kapaklı
Terminal tipi	Vidalı	için	Tırmaklı/Vidalı
Akkor Tel Deneyi	850 °C	Bilyeli termo sıcaklık	125 °C
Test voltajındaki rezistans	1 dak. için 2000 V a 50 Hz	Yalıtım direnci	> 5 MOhm
Prolonged operation socket (no.of position changes)	10.000, 250 V ac cosØ=0,8	Kablo çekmede terminal tutuşu	> 50 N
Terminal sıkıştırma kapasitesi	0,5-2x2,5 mm ² sert kablolar - 0,75-2x4 mm ² esnek kablolar	Standart	IEC 60884-1

DIMENSIONAL

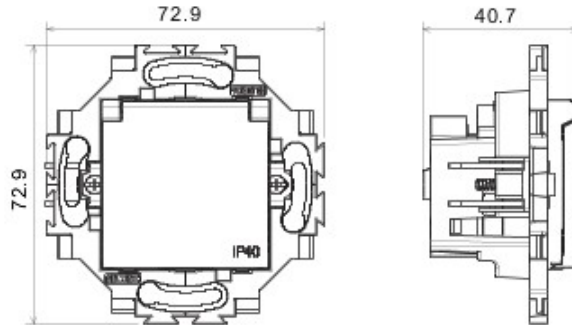

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

