



Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct illumination is provided by an optical system composed of different versions of lenses and sealed by an extra-clear tempered glass of 4mm. Guarnizioni in Silicone gaskets, breathing and anti-condensation device in Goretex, waterproof connector for 1.5 mm² cables and stainless steel external screws. Silntegrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

Çeşitleri	5700K soğuk ışık	Ağırlık (kg)	9.5
Optik	90°	Sistem gücü	125 W
Lümen çıkışı (lm)	14400	Renk sıcaklığı	5700 K (CRI>80)
Nominal flux (lm)	17000	panoları	İç / Dış
Direnç dayanıklı	IK08	Çalıştırma sıcaklığı	-30 +50 °C
Renk	Gri RAL 9006	Lamba	LED - değiştirilemez
Sürücü tipi	Driver Led Dali	LED akım	0.6 A
Seri	ESALITE FL - 16K	IP derecesi	IP66
Yalıtım sınıfı	I	Voltaj	220/240 V - 50/60 Hz
Entegre LED'lerin etkinlik sınıfı	A + A++	Garanti	5 yıl
Life time L90B10 (Tq 25°)	100000 h	Overvoltage resistance	Common mode: 8KV; Differential mode: 6KV
Life time L90B10 (Tq 50°)	50000 h	Ekran tipi	Tamperli cam
Elektrokod	2444		

DIMENSIONAL

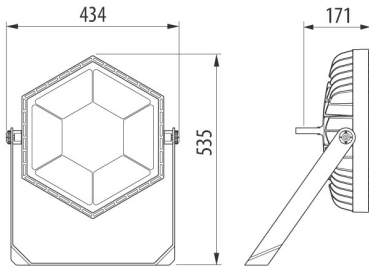

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IK
IK08

IP
IP66



STANDARDS/APPROVALS



Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice - Last update 16/11/2019