
# Product Data Sheet
# DX23225R
FK Range



Pliable protective conduit system FKHF range, made of PP: classification 2322, available in seven diameters, from 16 to 63 mm, with or without cable puller. Suitable for electrical system and/or data transmission. Suitable for flush mounting installation in floors, walls and ceilings or buried in concrete. Certified Halogen Free in compliance with EN 60754-2 and Low Smoke in compliance with EN 61034-2. Suitable for applications inside false ceilings and floating floors and installations in public places: schools, cinemas, theatres, underground etc..

| | | | |
|---|---|---|---|
| Colour | Grey RAL 7035 | Material | PP self-extinguishing |
| Length (m) | 75 | Type | without cable puller |
| Conduits Ø (mm) | 25 | Halogen Free | Yes, according to EN 50642 |
| Low smoke | Low smoke in according to EN 61034-2 | Resistance to compression | 2 (Light - 320 N) |
| Resistance to impact | 3 (Medium - 2 J) | Resistance to bending | 2 (Pliable) |
| Operating temperature | -5 +90 °C | Electrical characteristics | 2 (With electrical insulating characteristics) |
| Protection against ingress of solid objects without accessories | 0 | Protection against ingress of water | 0 |
| Resistance against corrosion | Not applicable to plastic conduit systems | Fire resistance | 1 (Non-flame propagating) |
| Insulation resistance | 100 MΩ a 500 V for 1 minute | Protection against ingress of solid objects with GF coupling | 4 |
| Dielectric rigidity | 2000 V a 50 Hz for 15 minutes | Standard | EN 61386-1 EN 61386-22 |
| Family | FKHF | Classification | 23222 |

## DIMENSIONAL

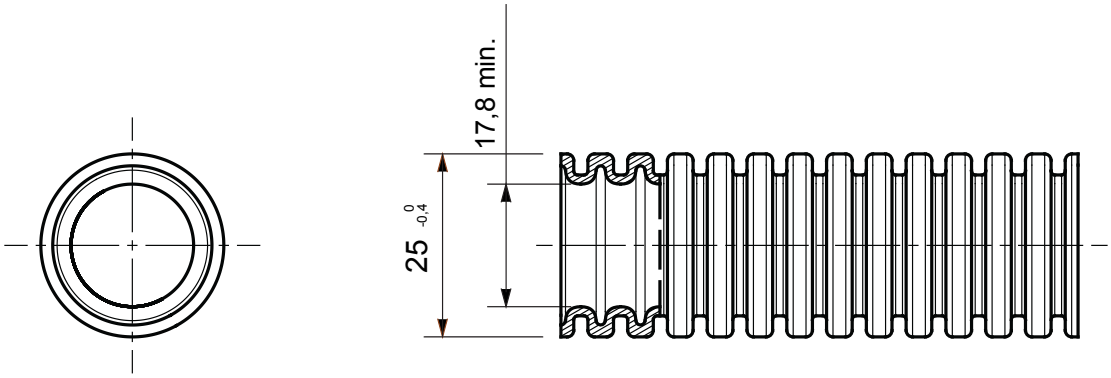


## TECHNICAL SYMBOLOGY




## STANDARDS/APPROVALS




GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 12/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice