




Wide range of control devices, sockets for power supply (conforming to national and international standards) signal pick-up, climate control, comfort management, technical alarm signalling and emergency lighting management. The ChoruSmart modular devices are available in five colours, glossy white, satin white, natural beige, satin black and lacquered titanium and in various sizes from 1/2, 1, 2 and 3 modules. Thanks to the mounting supports for rectangular, square and round boxes, endless combinations can be created with the ChoruSmart range of plates.

| | | | |
|--|----------------------------------|---|------------------------|
| kategoria | Gniazdo elektryczne | Opis | 2P+E - 15A |
| Kolor | Naturalny satynowy be? | wyj?ciowe | 250125V ac |
| Norma | Euro-ameryka?skie | Do sworznie wtyczki | Ø 4 mm P?aski |
| Zaciski okablowania | Ze ?rub? | Norma | IEC 60884-1 |
| Rezystancja przy napi?ciu probierczym | 2000 V przy 50 Hz przez 1 minut? | Rezystancja izolacji | > 5 Momów |
| Gniazdo do d?ugotrwa?ej pracy (ilo?? zmian pozycji) | 10,000 przy In 250 V AC cos?=0,8 | Twardo?? kulkowa | 125 °C |
| Próba roz?arzonym drutem | 850 °C | Uchwyt zacisku na trakcji kablowej | > 50 N |
| Zakres dokr?cenia zacisku przewody elastyczne (mm ²) | min. 0,75 - maks. 2x4 | Zakres dokr?cenia zacisku przewody sztywne (mm ²) | min. 0,5 - maks. 2x2,5 |
| Liczba modu?ów Modu?y | 1 | Electrocod | 0131 |
| Materia? | Technopolimerowy | | |

DIMENSIONAL

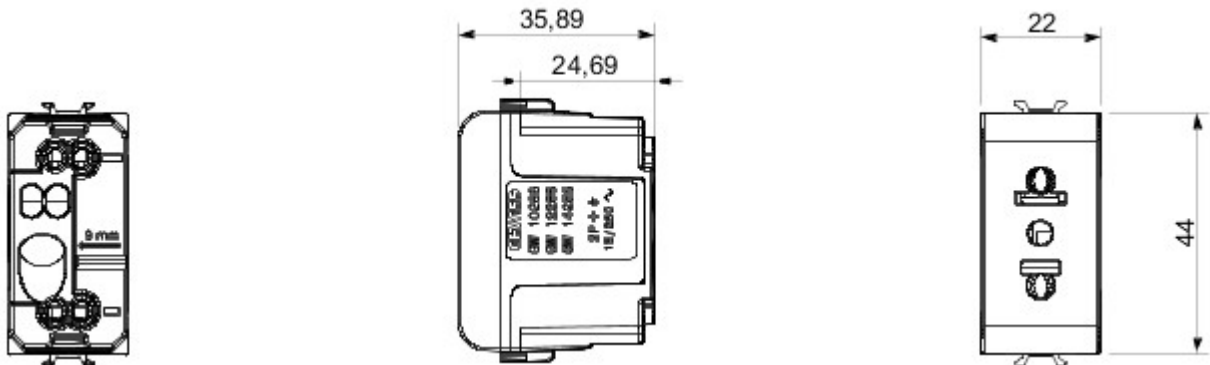

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

