
# Product Data Sheet
# GW10351AB


CHORUSMART - Domestic range



A range of ChoruSmart modular devices and plates made of antibacterial technopolymer in a glossy white finish, suitable for use in hospitals, nursing homes, schools and wherever cleanness and hygiene are essential. The effective silver-ion antibacterial treatment can reduce bacterial growth by 99% within 24 hours and has been verified by certified laboratory testing in accordance with standard ISO 22196 (analysis of major strains of Staphylococcus aureus and E. coli bacterial species).

| | | | |
|---|---|---|---|
| Category | Dual amperage socket-outlet | Description | 2P+E - 16 A |
| Colour | Red | Voltage | 250 V ac |
| Standard | German | Characteristics | With safety shutters |
| For plug pins | Ø 4.8 mm | Wiring terminals | Screws with front tightening terminals |
| Standard | IEC 60884-1; DIN VDE 0620-1; UNE 20315-1-1 | Resistance at test voltage | 2000 V at 50 Hz for 1 minute |
| Insulation resistance | > 5 MOhm | Prolonged operation socket (no.of position changes) | 10.000 at In 250 V ac cosφ=0.8 |
| Thermo-pressure with ball | 125 °C | Glow Wire Test | 850 °C |
| Terminal grip on cable traction | > 50 N | Terminal tightening capacity stranded cables (mm²) | min. 0.75 - max. 2x4 |
| Terminal tightening capacity solid cables (mm²) | min. 0.5 - max. 2x2.5 | No. modules | 2 |
| Electrocod | 0131 | Material | Antibacterial tecnopolymer |

## DIMENSIONAL

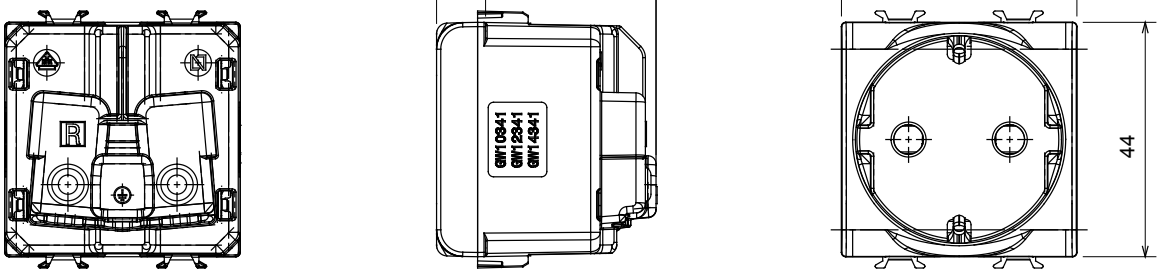


## TECHNICAL SYMBOLOGY




## STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 25/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice