Product Data Sheet

GW46201F

46 Range



Range of Watertight surface-mounting boards made in polyester material reinforced with fibreglass. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 7 sizes, transparent and black door versions with IP66 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor and outdoor applications.


GENERAL INFORMATION	-
Standard	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24
Family	46 QP
Type of door	Transparent door
Nominal dim. LxHxD (mm)	250x300x160
Functional dim. LxHxD (mm)	253x303x160
Material	Polyester reinforced with fibreglass
Type of material	Halogen-free in compliance with EN 60754-2
Colour	Grey RAL 7035
Maximum rated insulation voltage (Ui)	690 V
Insulation voltage	1000 V AC - 1500 V DC (according to EN 62208)
Dispersible power A (W)	34
Dispersible power B (W)	-

MECHANICAL AND FUNCTIONAL CHARACTERISTICS	-
Operating temperature	-25 +60 °C
IP degree	IP66
Mechanical resistance	Bottom IK10
Glow Wire Test	650 °C
Thermo-pressure with ball	Cassa 200 °C - Oblò 70 °C
UV resistance	Yes, according to EN 62208
ELECTRICAL CHARACTERISTICS	-
Insulation class	II
No. locks	1
ACCESSORIES	-
Surface-mounting brackets	GW46446-GW46451
Kit for double insulation restore	GW46526


BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Not resistant	Limited resistance	Resistant	Resistant

DIMENSIONAL

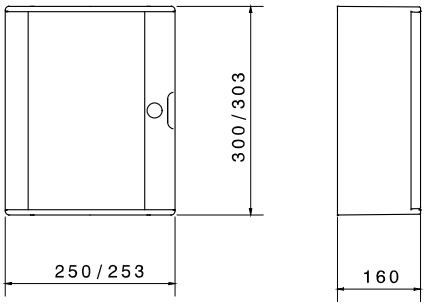

TECHNICAL SYMBOLOGY



-25 +60 °C

IP

IP66

IK

Bottom IK10

GWT

650 °C



Cassa 200 °C - Oblò 70 °C

HF
HALOGEN FREE

Halogen-free in compliance with EN 60754-2



II

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice