




Smart Gateway is the central element of the Home and Building PRO solution. It enables the centralisation of logic and automation management functions for the home, the collection of data from home sensors, sending of commands to actuators, communication with cloud applications. It transfers data from networks of connected devices (KNX, ZigBee, etc.) to devices and client applications, allowing information to be exchanged between devices with different communication protocols. The management of functions and data access takes place through the cloud platform, via a dedicated app (for PCs, smartphones and tablets).

| | | | |
|--------------------------------------|-----------------------|--------------------------|---|
| Omschrijving | Multiprotocol gateway | License type | Without license |
| Kleur | Wit | Voedings- spanning | 12 V DC - 1 A |
| Voeding ingangen | 7 VA | Radio connections | Wi-Fi (IEEE 802.11 b/g/n), Zigbee (IEEE 802.15.4) |
| Interfaces | USB 2.0, RJ45, KNX | KNX bus consumption (mA) | 5 |
| Configuratie | Via cloud | Standaard | 2014/53/EU, 2009/125/EU, 2011/65/EU, 2012/19/EU |
| IP- graad | IP20 | Afmetingen (mm) | 171x110x30 |
| Bedrijfs- temperatuur | -5 ÷ +45 °C | Opslagtemperatuur | -20 ÷ +80 °C |
| Relative humidity (non-condensative) | Max 93% | Electrocod | 3800 |

DIMENSIONAL

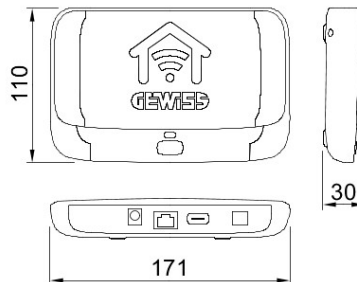

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

