




Type 2 mobile connector, compliant with IEC 62196-1 and IEC 62196-2, designed for charging electric vehicles compliant with IEC 61851-1 regulations, equipped with an external textured coating on the lower portion to improve grip and facilitate insertion into the relative inlet. It is supplied pre-wired with a smooth 5/8 m cable or 4 m spiral cable. This product is also equipped with a rubber cable gland and has an IP55 protection rating if inserted in its protective insulating cover. Brand customisation options are available.

Handle colour	Black RAL 9004	IP- graad	IP55 (with sheath or cap)
Stoot- bestendigheid	IK10	Cable gland and plug colour	Black RAL 9004
Gloeidraadproef	850°C (active parts) / 650°C (external)	Aantal polen	L1/L2/L3 - N- PE - CC - CP
Nominale stroom	16 A	Opslagtemperatuur	-30°C ÷ +50 °C
Wiring section	6 mm ²	Nominale frequentie (Hz)	50/60 Hz
Kabel- lengte	8 m	Cable colour	Zwart
Cable type	Smooth		

DIMENSIONAL

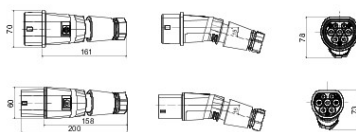

TECHNICAL SYMBOLOGY

IP

IP55 (with sheath or cap)

IK

IK10

GWT

850°C (active parts) /
650°C (external)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 18/05/2024

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice