



ELIA CL is an LED device made from white polycarbonate designed for ceiling or surface mounting, ideal for lighting stairways, bathrooms/rest rooms and service areas. It is quick and easy to install, and features clean, minimalist lines. Designed in two different sizes and power versions, it features a polycarbonate opal diffusing shell, a colour temperature of 4,000 K (neutral white) and a colour rendering index of more than 80. ELIA CL is also available in the Sensor version, with movement detection up to 8m, a radius of up to 120° and duration of 30 seconds, and in the Emergency version, the luminous flux is guaranteed for 3 hours of operation at 10%. It has been designed to withstand temperature variations from -20°C to +45°C, and offers protection from water and dust penetration of up to level IP54 and from shocks and impacts of up to level IK08. Light and easy to handle, ELIA CL is easy to install thanks to the steel bracket on the back of the device for wall mounting, the quick-coupling terminal on the rear of the device for the electrical wiring and the bayonet locking mechanism for attaching the body of the light.

GENERAL INFORMATION

Context	Interior lighting
Luminaire	LED luminaire for diffuse light
Toepassing	Intern
Unique digital code (Datamatrix)	Currently not present
Kleur	Wit
Type lichtbron	LED
System vermogen	12 W
LED Lifetime	L80B50 (Tq25°) = 50.000h
Gewicht (kg)	0.5
Garantie	5 jaar
Opslagtemperatuur	-20° +65°
Operating temperature	-20° +45°

MATERIALS

Body	Polycarbonate
Type plaat	Polycarbonate
Optic	Opalescent polycarbonate diffuser
Gasket	-
Locking Hook	-
External screw	-
Colour	Polycarbonate coloured in paste

STANDARDS AND APPROVALS

Classificering	-
Toestel met verlaagde oppervlaktetemperatuur	-
DIN 18032-3-certificering	-
IPEA	-
Isolatie-klasse	II
IP-graad	IP20 - IP54
Stootbestendigheid	IK08
Glow Wire Test	750 °C

OPTIC AND ILLUMINATING FEATURES

Optiek	Wide opal
Unified Glare Rating	-
Lumen-vermogen (lm)	1300
Efficacy (lm/W)	108
Kleur temperatuur	4000 K
Colour Rendering Index	CRI 80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Standaard	EN 60598-1; EN 60598-2-1; IEC/TR 62778; EN 62493

ELETRICAL AND LIGHTING FEATURES


Voedings-spanning	220-240 V
Nominale frequentie (Hz)	50 / 60
Driver	Ingebouwd
Driver failure rate	F025 (Tq=25°C) = 50.000 h
Overvoltage protection	DM 0,5 kV
Control System	ON / OFF

INSTALLATION AND MAINTENANCE


Mounting and installation	Ceiling - Wall
Tilt	-
Wiring	With integrated terminal
Bevestiging	Via integrated rear steel bracket
Light source replaceability	Non-replaceable
Controlgear replaceability	Non-replaceable

Driver Box	Ingebouwd
Maximum surface exposed to the wind	-

DIMENSIONAL

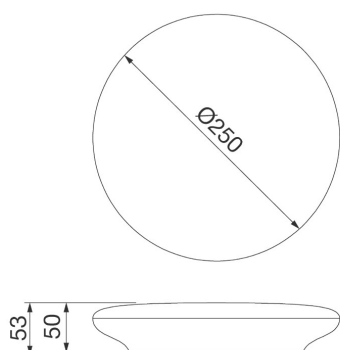

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IK

GWT

STANDARDS/APPROVALS



Data, measures, designs and pictures are for information purpose only, last update 13/05/2024. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.