

STADIUM PRO




Spatium PRO | 2 is a high-power LED floodlight, with a high-emittance LES (light emitted surface), suitable for lighting professional and semi-professional sporting facilities. The floodlight has a graphite grey finish with trivalent treatment for maximum resistance to oxidation and is equipped with an integrated 'self-cleaning' heat dissipation system. It consists of 2 modules, each with a bleed and anti-condensation valve, protected from accidental impact. The rotation system between the brackets and optic modules is of the truncated-conical aluminium type, with an integrated goniometer in the bracket for easy control of orientation, and screw and grub screw fastening, which guarantees the fastness of each individual module over time. The floodlight is available in the following colour temperatures 4,000K or 5,700K and colour rendering CRI>70, CRI>80 o CRI>90 (TLCI>80). In addition, the range offers 6 types of circular optics, from 8° up to 40°, 1 symmetrical/elliptical optic and 2 asymmetric optics. The T.I.R.Ex. optic system developed by GEWISS with lenses in PMMA HT (high-transparency), gives complete control over the light beam, allowing for great flexibility in any project design, with high qualitative and quantitative performance. The power supply box can be installed on the bracket or remote, and is protected from surges up to 10KV, either in differential or common mode, with a single cable. The range requires a DALI2 or DMX-RDM power supply to permit the greatest flexibility in the creation of lighting scenarios, even of great complexity.


GENERAL INFORMATION

Context	Professional sport lighting	OPTIC AND ILLUMINATING FEATURES	
Luminaire	High power LED floodlight	Optiek	Circular 10°
Toepassing	Binnenshuis / buitenshuis	Unified Glare Rating	ULOR = 0%
Unique digital code (Datamatrix)	Currently not present	Lumen-vermogen (lm)	101000
Kleur	Grafiëtgrijs	Efficacy (lm/W)	105
Type lichtbron	LED	Kleur temperatuur	5700 K
System vermogen	960 W	Colour Rendering Index	CRI 80
LED Lifetime	L90B10(Tq25°C)=40.000h; L80B10(Tq25°C)=75.000h	Standard Deviation Colour Matching	SDCM = 3
Gewicht (kg)	18	Photobiological Risk Class	-
Garantie	5 jaar	Standaard	EN60598-1; EN60598-2-5; IEC 62471; IEC 62778
Opslagtemperatuur	-	ELETRICAL AND LIGHTING FEATURES	-
Operating temperature	-25 +50 °C	Voedings-spanning	See external supply unit
MATERIALS	-	Nominale frequentie (Hz)	See external supply unit
Body	Gietaluminium	Driver	To be ordered separately
Type plaat	Flat tempered glass 4mm	Driver failure rate	See external supply unit
Optic	T.I.R.Ex. Optical PMMA HT	Overvoltage protection	See external supply unit
Gasket	Anti-aging silicone	Control System	See external supply unit
Locking Hook	-	INSTALLATION AND MAINTENANCE	-
External screw	Stainless steel	Mounting and installation	Lighting tower - Surface
Colour	Polyester powder coated	Tilt	Rotation on bracket with integrated goniometer
STANDARDS AND APPROVALS	-	Wiring	Watertight connector between floodlight and power supply unit
Classificering	-	Bevestiging	Beugel
Toestel met verlaagde oppervlaktetemperatuur	-	Light source replaceability	By professional
DIN 18032-3-certificering	-	Controlgear replaceability	By professional
IPEA	-	Driver Box	Extern
Isolatie-klasse	I	Maximum surface exposed to the wind	0,24 m2
IP-graad	IP66		-
Stootbestendigheid	IK08		-
Glow Wire Test	-		-


DIMENSIONAL

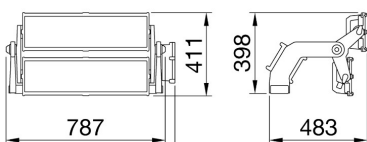

PHOTOMETRIC DISTRIBUTION



STADIUM PRO



TECHNICAL SYMBOLOGY



IP
IP66

IK
IK08

GWT
-

STANDARDS/APPROVALS

