



Description Interruttore automatico scatolato
Code MSX 400
Nombre de pôles 3P+N
Courant nominal 400 A
Déclencheur Elettromeccanico


ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS	
Norme	IEC/EN 60947-2	Exécution	Fisso - Rimovibile
Catégorie d'utilisation	A	DIN rail mounting	Non
Fréquence nominale (Hz)	50 / 60	Accessoriabile con comando motore	Si
Rated operating voltage (Ue)	690 Vac - 250 Vdc	Compatible interlock	Lever - Cable
Tension nominale tenue à l'impulsion (Uimp)	8 kV	Terminals supplied	FC avant
Catégorie de surtension	IV	Position de montage	Tout
Tension d'isolement (Ui)	800 V	Upline/downline power supply	Si
Thermal regulation	0,63 - 0,8 - 1 x In	Electrical life (415Vac)	4.500 cicli
Magnetic regulation	6 - 8 - 10 - 12 x In	Mechanical life	15.000 cicli
Neutral protection	Non protetto	Température d'utilisation	-5°C +65°C
Total power loss	89.59999999999999 W	Température de stockage	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Poids (kg)	5,6
Rated short-time withstand current for 0,3s (Icw)	-	Largeur	185 mm
I _{dn} regulation	-	Hauteur	260 mm
DT regulation	-	Profondeur	103 mm

SERVICE BREAKING CAPACITY (ICU)

SERVICE BREAKING CAPACITY (ICU)		RATED BREAKING CAPACITY (ICS)	
220/240Vac	85 kA	220/240Vac	85 kA
400/415Vac	50 kA	400/415Vac	50 kA
440Vac	45 kA	440Vac	45 kA
525Vac	30 kA	525Vac	30 kA
690Vac	20 kA	690Vac	15 kA
250Vdc	40 kA	250Vdc	40 kA

DIMENSIONS

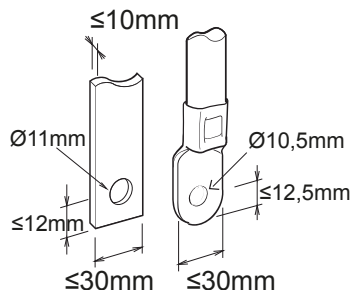



Fiche produit

GWD9366

Gamme MSX

NORMES ET HOMOLOGATIONS

