



Industrial LED lighting fixture made of die-cast EN AB 46100 aluminium with polyester powder coating. Correct illumination is provided by an optical system composed of different versions of lenses and sealed by an extra-clear tempered glass of 4mm. Silicone gaskets, Goretex breathing and anti-condensation device, waterproof connector for 1.5 mm² cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminium. The die-cast aluminium structure guarantees optimal performance conditions both at Ta25° and Ta50° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

GENERAL INFORMATION

| | |
|----------------------------------|---|
| Context | Lighting for parks and green areas |
| Luminaire | LED luminaire with mid and high lumen power |
| Application | Indoor / Outdoor |
| Unique digital code (Datamatrix) | Datamatrix |
| Colour | Grey RAL 9006 |
| Type of light source | LED |
| System power | 148 W |
| LED Lifetime | L90B10 (Tq 25°) 100000 h; L90B10 (Tq 50°) 55000 h |
| Weight (kg) | 8.5 |

| | |
|-----------------------|------------------------------|
| Warranty | 5 years |
| Stocking temperature | -25°C ÷ +70°C / HR 10% ÷ 85% |
| Operating temperature | -25°C ÷ +40 °C |

MATERIALS

| | |
|----------------|-------------------------|
| Body | Die-cast aluminium |
| Shield type | Flat tempered glass 4mm |
| Optic | PMMA lens |
| Gasket | CNC deposited sealant |
| Locking Hook | - |
| External screw | Stainless steel |
| Colour | Polyester powder coated |

STANDARDS AND APPROVALS

| | |
|---|------|
| Classification | - |
| Device with reduced surface temperature | - |
| DIN 18032-3 certification | No |
| IPEA | - |
| Insulation class | I |
| IP degree | IP66 |
| Mechanical resistance | IK08 |
| Glow Wire Test | - |

OPTIC AND ILLUMINATING FEATURES

| | |
|------------------------------------|---|
| Optic | Wide 90° |
| Unified Glare Rating | UGR ≤ 25 |
| Lumen output (lm) | 15600 |
| Efficacy (lm/W) | 105 |
| Colour temperature | 3000 K |
| Colour Rendering Index | CRI>80 |
| Standard Deviation Colour Matching | SDCM = 3 |
| Photobiological Risk Class | - |
| Standard | EN60598-1; EN60598-2-5; IEC 62778; IEC62471 |


ELETRICAL AND LIGHTING FEATURES

| | |
|------------------------|--------------------------------------|
| Supply voltage | 220-240 V |
| Rated frequency (Hz) | 50/60 Hz |
| Driver | Included |
| Driver failure rate | F10 = 100.000h Tq25°C/50.000h Tq50°C |
| Overvoltage protection | DM 6KV / CM 8KV |
| Control System | DALI |


INSTALLATION AND MAINTENANCE

| | |
|-------------------------------------|---------------------------|
| Mounting and installation | Wall/ground |
| Tilt | With graduated support |
| Wiring | With watertight connector |
| Fixing | - |
| Light source replaceability | Non-replaceable |
| Controlgear replaceability | By professional |
| Driver Box | Built-in |
| Maximum surface exposed to the wind | 0,14 m ² |

DIMENSIONAL

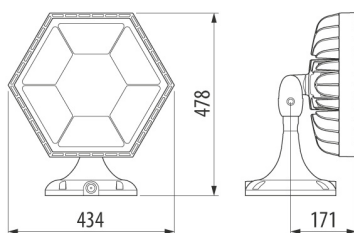

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

