





Road reinforcement with road optics and simplified maintenance, consisting of cover, frame and pole attachment in powder coated aluminium die-casting: aluminium with low copper content powder coated polyester after pre-treatment, for increased corrosion resistance. PA6 side ventilation grills. Optical system made with methacrylate lens, consisting of several different lenses that, with a single photometric distribution, and varying the installation parameters and the number of motors installed, allows the achievement of the obligatory road requirements. Common immunity to surges up to 12kV, according to IEC EN 61000-4-5 (issued by a third party) without the aid of additional protective devices. Can be used up to 50°C ambient temperature but with reduction of the supply current as indicated in the Instruction Manual.

| Application | External | Series | STREET [O3] |
|----------------------------|---|--|-----------------|
| Type | Programmable (5 step) | IP degree | IP66 |
| Mechanical resistance | IK08 BODY - IK06 LENS | Insulation class | II |
| Tilt adjustable | ±20° bracket - 0°÷20° pole head | Maximum surface exposed to the wind | 0.26 m² |
| Operating temperature | -25 +25 °C | Weight (kg) | 9.7 |
| Colour | Graphite/Aluminium | Minimum distance from the illuminated object | 1 m |
| Voltage | 220/240 V - 50/60 Hz - Stand alone and/or programmable 5 Step | Lamp | LED |
| System power | 99 W | Optic | ST2 - ULOR: 0% |
| Voltage | 220-240 V - 50/60 Hz | Colour temperature | 4000 K (CRI>70) |
| LED current | 700 mA | Number of modules | 3 (3x16 LED) |
| Nominal flux (lm) | 11740 | Lumen output (lm) | 10300 |
| Photobiologic Risk | RG1/RG2 @ 20cm | LED Life Time (L80B10) | 100000 h |
| LED Life Time (L90B20) | 50000 h | Warranty | 5 years |
| Electrocod | 244C | Light source replaceability | By professional |
| Controlgear replaceability | By professional | | |

DIMENSIONAL

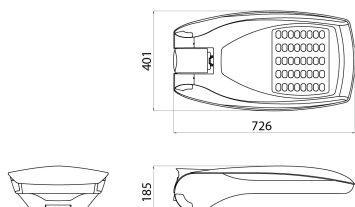

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP
IP66

IK

IK08 BODY -
IK06 LENS



0.26 m²



INSTALLATION
-25°C
+25°C



1 m



STANDARDS/APPROVALS

