






I-FAST products are JOINON's DC fast-charging solutions ideal for charging all types of electric vehicles equipped with high-voltage systems in private or public high-rotation parking lots, highways and service areas. The offer consists of wallboxes up to 30 kW and stations up to 480 kW. They feature an elegant design and finishes that make them an urban and extra-urban furnishing product, with a graphic display for a better User Experience and use of services for the EV Driver user.

<b>Power specification - AC input</b>		<b>Environmental</b>	
Input voltage	3Φ 380 ± 415 V ac	Operating temperature	-30°C ± +50°C
AC input connection	3P+N+PE (Wye configuration), TN/TT	Humidity	5% ÷ 95% RH, Non-Condensing
Max input current	3Φ 460A	Altitude	≤ 2.000 m
Frequency	50 Hz / 60 Hz	IP degree	IP54
Power factor	> 0.99	Mechanical resistance	IK10 (not including screen, POS & RFID module)
Efficiency	>95%	Cooling method	Fan cooling
<b>Power specification - DC output</b>		<b>Mechanical</b>	
Output voltage range	CCS2: 150 ÷ 950 V dc	Dimension	1053 mm x 664 mm x 2037 mm
Max output current	CCS2: 300A (peak 500A)	Weight	765 kg
Maximum output power	240 kW	Cable length	4.5 m
Voltage/Current accuracy	±2%	<b>Protection</b>	
<b>User interface &amp; control</b>		Input protection	
Display	21,5" LCD	OVP, OCP, OPP, OTP, UVP, RCD, SPD	
Push buttons	Operation Buttons / Emergency Stop Button	Output protection	
User Authentication	RFID: support ISO 14443A/B, OCPP 1.6 JSON, OCPP 2.0.1, QR Code, App	SCP, OCP, OVP, LVP, OTP, IMD	
<b>Meter</b>		<b>Regulation</b>	
DC PTB Meter		Accessibility	
<b>Communication</b>		Reduced component heights for universal accessibility	
External		Safety	
Ethernet, Wi-Fi and 4G		Certificate	
Internal		IEC 61851-1, IEC 61851-23, IEC 61851-21-2	
CAN bus / RS485		Charging interface	
		DIN 70121, ISO 15118-2	
		National directives	
		UK Public CP Regulation 2023 (manufacturer requirements)	
<b>Contactless Solution</b>			
Payment terminal			
Yes, Payter Apollo Polar			

## DIMENSIONAL

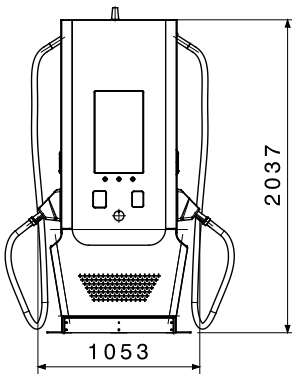

## TECHNICAL SYMBOLOGY

IP54

IK10 (not including screen, POS & RFID module)

GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 24/06/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and  
coordination of Polifin S.p.A.

[www.gewiss.com](http://www.gewiss.com)  
[sat@gewiss.com](mailto:sat@gewiss.com)  
Last update 24/06/2026

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice