



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.  
 DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.  
 The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.  
 The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.


#### ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS		FUNCTIONAL CHARACTERISTICS	
Circuit breaker	Rotary isolator	Version	Enclosed
Rated current (A)	80	Material	Insulating
No. of poles	3P+N	Type	Control
Rated insulation voltage $U_i$ (Vac)	690	Knob colour	Black
Rated operational current AC-21A (415 V) (A)	80	Lockable	Yes (max. 3 padlocks in ON and OFF)
Rated operational current AC-22A (415 V) (A)	80	IP degree	IP66/IP67/IP69
Rated operational current AC-23A (415 V) (A)	80	Mechanical resistance	IK08
Conditional short circuit current $I_{cc}$ (415 V) (kA)	6	Protection against indirect contact	Double insulation
Cable section	2,5-25 mm <sup>2</sup>	Operating temperature	-25 +60 °C
<b>ACCESSORIES</b>		Cable entries on top	2 x M25/M32 knock-outs
Type of accessory	Max. 2 auxiliary contacts (1 per side)	Cable entries on bottom	2 x M25/M32 knock-outs

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Resistant	Resistant

#### DIMENSIONAL

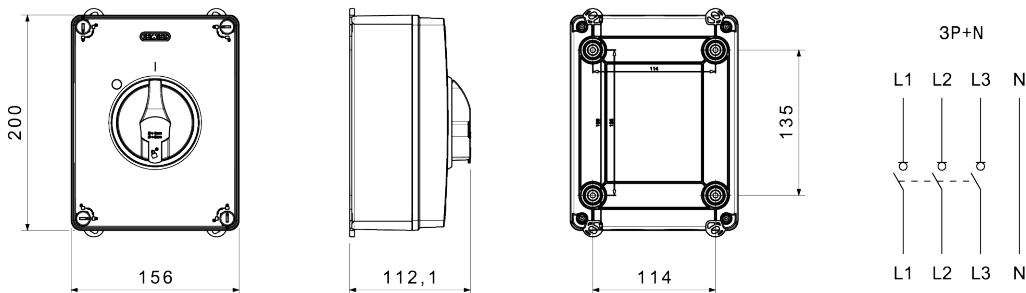

#### TECHNICAL SYMBOLOGY

**IP**

**IK**

IP66/IP67/IP69

IK08

#### STANDARDS/APPROVALS

