
Product Data Sheet
GWD4817R
ReStart Range



Description	Automatic reclosing device
Code	ReStart Rd 2P
Coupled with	GWD4817
Rated voltage	AC 230 V
Rated current	25 A
No. modules	3
Standard	IEC EN 63024, IEC EN 61008-1, IEC EN 61008-2-1
Rated frequency (Hz)	50 - 60 Hz

Distribution system	TT - TN-S	Rated non-operating resistance between live parts and earth (Rdo)	8 kΩ
Insulation voltage (Ui)	500 V	Rated operating resistance between live parts and earth (Rd)	16 kΩ
Rated impulse withstand voltage (Uimp)	4 kV	Maximum operating frequency	30 oper./h
Overvoltage category	III	Mechanical endurance	4000
Dielectric strength test voltage between pole and earth	2500 V ac for 1 minute	Type of residual current protection	A
Rated residual operating current	30 mA	Operating temperature	-5°C ÷ +40°C
Stocking temperature	-40°C ÷ +70°C	Automatic reclosure for untimely tripping	Yes
Earth failure test	Yes	Continuous system monitoring	No
Number of poles	2P	Electrocod	1414

DIMENSIONAL

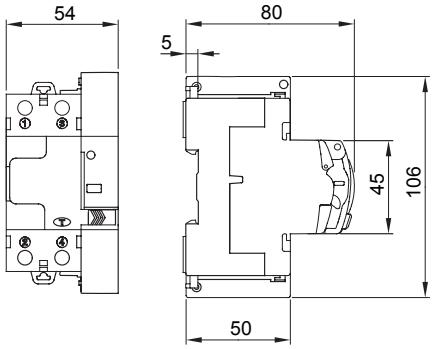

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice