Product Data Sheet

GWD9366


MSX



Description	Interruttore automatico scatolato
Code	MSX 400
No. of poles	3P+N
Rated current	400 A
Release	Electromechanic

ELECTRICAL CHARACTERISTICS	-	**MECHANICAL CHARACTERISTICS**	-
Standard	IEC/EN 60947-2	Execution	Fixed - Plug-in
Use category	A	DIN rail mounting	No
Rated frequency (Hz)	50 / 60	Can be equipped with motor operator	Yes
Rated operating voltage (Ue)	690 V ac - 250 V dc	Compatible interlock	Lever – Cable
Rated impulse withstand voltage (Uimp)	8 kV	Terminals supplied	Front FC
Overvoltage category	IV	Assembly position	Any
Insulation voltage (Ui)	800 V	Upline/downline power supply	Yes
Thermal regulation	0.63 - 0.8 - 1 x In	Electrical life (415Vac)	4.500 cycles
Magnetic regulation	6 - 8 - 10 - 12 x In	Mechanical life	15.000 cycles
Neutral protection	Not protected	Operating temperature	-5°C +65°C
Total power loss	89.6 W	Stocking temperature	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Weight (kg)	5.6
Rated short-time withstand current for 0,3s (Icw)	-	Width	185 mm
Idn regulation	-	Height	260 mm
DT regulation	-	Depth	103 mm
SERVICE BREAKING CAPACITY (ICU)	-	**RATED BREAKING CAPACITIY (ICS)**	-
220/240Vac	85 kA	220/240Vac	85 kA
400/415Vac	50 kA	400/415Vac	50 kA
440Vac	45 kA	440Vac	45 kA
525Vac	30 kA	525Vac	30 kA
690Vac	20 kA	690Vac	15 kA
250Vdc	40 kA	250Vdc	40 kA

DIMENSIONAL

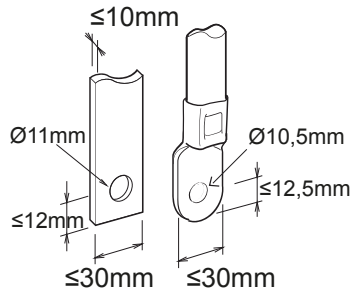

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice

Product Data Sheet

GWD9366

MSX

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice