




The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.


| | | | |
|-----------------------------|-----------------------------|-----------------------------|----------------------------------|
| Type | Q-BOX 4 ACS | board type | Wired |
| Colour | Light blue | Outer dim. LxHxD (mm) | 636x821x400 |
| Weight (kg) | 21 | Accordance with Standards | EN 61439-4 (ACS) |
| Characteristics | UV resistance (EN 62208) | IP degree | IP55 |
| Shock resistance | IK10 | Glow wire test | 650 °C |
| Thermo-pressure with ball | 70 °C | Insulation class | II |
| Power supply | Fixed plug | No. of poles | 3P+N+E |
| Power suppliable (kW) | 17 | Mains switch | RCBO 32A 4P 6 kA 0,03A - AC type |
| MCB'S MT main RCCB | RCCB 40A 4P 0,03A - AC type | Circuits protection | MCB |
| No. socket outlets | 4 | Socket-outlet 2P+E 16A - IB | 3 |
| Socket-outlet 3P+E 16A - IB | 1 | Emergency push-button | Yes |
| Electrocod | 139 | | |



DIMENSIONAL

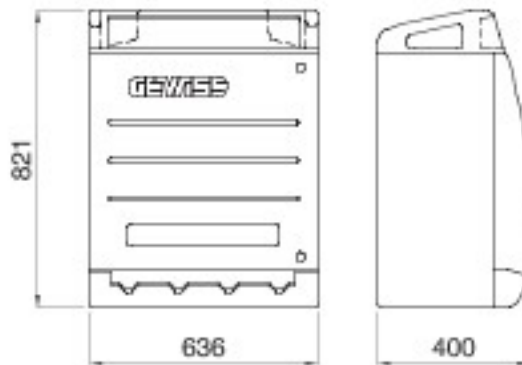


TECHNICAL SYMBOLOGY



IP
IP55

IK
IK10

GWT
650 °C



STANDARDS/APPROVALS

