


The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.

Tipologia	Q-BOX 6 ACS	board type	Cablagem
Cor	Azul claro	Dim. externas BxHxP (mm)	914x821x400
Peso (kg)	30	Conformidade normativa	EN 61439-4 (ASC)
Características	Resistência UV (EN 62208)	Grau de protecção	IP55
Resistên. golpes	IK10	Teste de fio incandescente	650 °C
Termopressão com esfera	70 °C	Classe isolamento	II
Alimentação	Ficha fixa	N. pólos	3P+N+T
Potência distribuível (kW)	17	Disjuntores geral	RCBO 32A 4P 6 kA 0,03A - AC type
Circuits protection	MCB	N. tomadas	6
Tomada 2P+T 16A - IB	3	Tomada 3P+T 16A - IB	2
Tomada 3P+N+T 16A - IB	1	Emergency push-button	Si
Código Electrocod	139		



DIMENSIONAL

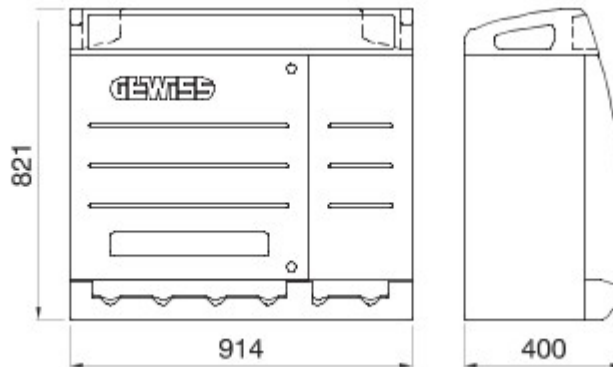

TECHNICAL SYMBOLOGY



EN 61439-4 (ASC)



Resistência UV (EN 62208)

IP

IP55

IK

IK10

GWT

650 °C



70 °C



II

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 22/11/2019

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice